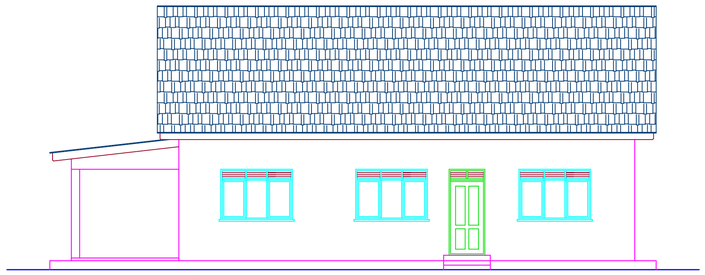

ELEVATION AT "B"
scale; 1:100(residential facility)

ELEVATION AT "C"
scale; 1:100(residential facility)

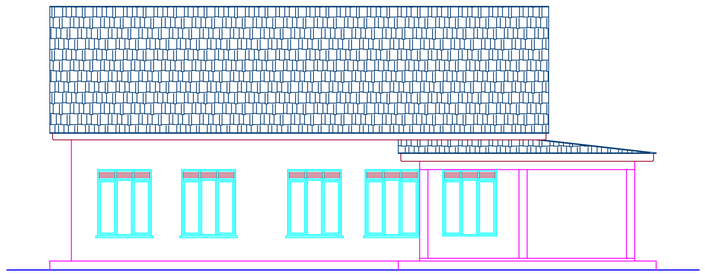

ELEVATION AT "A"
scale; 1:100(residential facility)

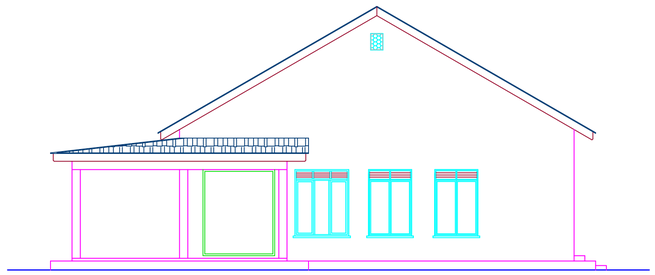

ELEVATION AT "D"
scale; 1:100(residential facility)

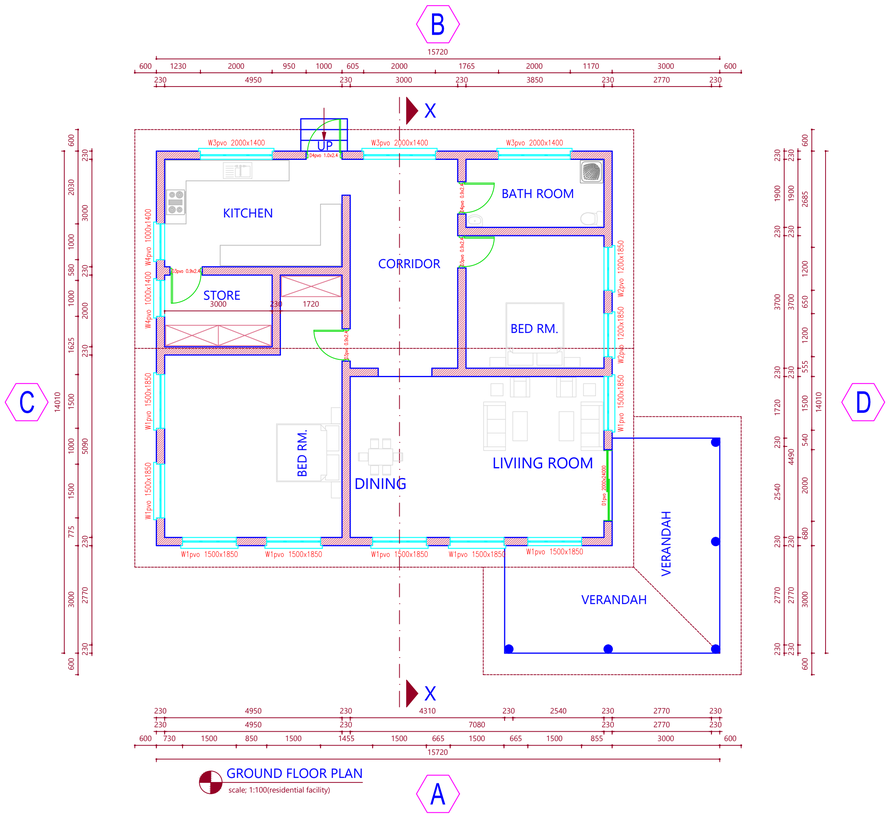

GROUND FLOOR PLAN
scale; 1:100(residential facility)

ROOF CONSTRUCTION NOTES

Roof pitch at 35 degrees on
Gauge 28 mat-tiles roof coverings and ridges on
50 x 75 mm sawn timber purlins on
50 x 100 mm sawn timber rafters, struts and ties on
50 x150 mm sawn timber tie beams on
100 x 75 mm sawn timber wall plates
Plaster on expanded metal lathing ceiling on
50 x 100 mm ceiling joists and branderings

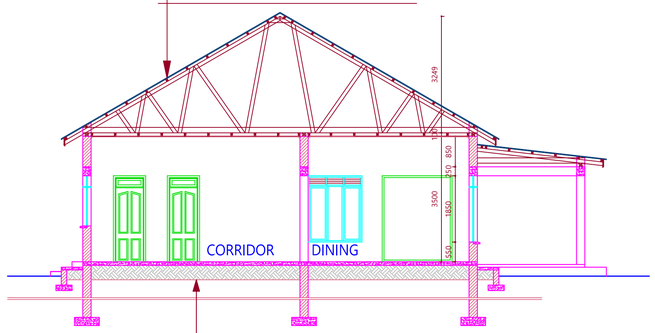

SECTION X-X
scale; 1:100(residential facility)

FOUNDATION CONSTRUCTION NOTES

25 mm thick cement sand screed floor finish on
100 mm thick concrete floor slab on
Gauge 1000 polythene membrane dpm on
230 mm thick blinded hard core on consolidated soil back fill
690 x230 mm thick strip foundation mass concrete
Depth of foundation to be determined on site

WINDOW SCHEDULE

Ntn	Width	Height	Qty	Description
W1	1500	1850	08	Glass in Steel Sliding Windows
W2	1200	1850	02	-DO-
W3	2000	1400	03	-DO-
W4	1000	1400	02	-DO-

DOOR SCHEDULE

D1	2000	2400	01	Vertical Rolling Door
D2	1000	2400	01	Glass in Steel Casement Door
D3	900	2400	03	Frame Ledged Doors
D4	900	2400	01	Solid Core Flash Door

SEPTIC TANK NOTES

1. All dimensions are in millimetres and all scales are 1:100 unless indicated otherwise.
2. All brickworks are burnt clay in English bond in cmt+sand mortar mix 1:4.
3. All benching are in 1:3:6 conc. and cmt+sand mortar finish mix 1:3.
4. All inspection chambers are to be air tight with cast iron frames and covers.

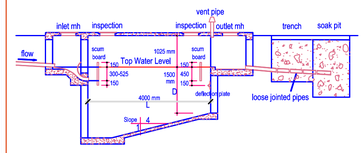

LONGITUDINAL SECTION



CROSS SECTION



TOP PLAN

SEPTIC TANK SCHEDULE

No. of Users	L	B	D	Capacity
20	2400	1200	1500	4220 Ltrs
30	3000	1500	1500	5880 Ltrs
40	3400	1700	1800	7240 Ltrs
50	3600	1800	1800	8600 Ltrs

MANHOLE SCHEDULE

type	shallow			deep	extra deep
	a	b	c		
Depth to invert	0 - 600	600 - 900	900 - 1800	1800 - 4500	>4500
Min. length	600	750	1000	1200	1200
Min. width	450	600	750	800	1200
Ht above benching	-	-	-	2000	2000
Wall thickness	115	115	225	225	225 - 350
Conc. base	100	100	150	300	300 - 450

Tittle:	PROPOSED CONSTRUCTION OF A RESIDENTIAL FACILITY TO BE DONE IN LAGWINY VILLAGE, PARISH, BUNGATIRA SUB COUNTY, ASWA COUNTY, GULU DISTRICT.
Client:	MRS. JOSEPHIN ADONG OKELLO C/O Tel +447941127142
Sign:	----------

MASTERTECH CONSTRUCTION (U) LTD
C/O P.O.BOX 109 GULU
PLOT 6 B GULU AVENUE
mastertechugandalimited@yahoo.com

Designed:	MR. KIDEGA PATRICK Tel;0774-010260/0714-010260
Drawn:	CAD
Checked:	MR. OKUMU CHARLES Tel; 0773-112821/0712-539598
Date:	SEPT. 2020
Scale:	1:100
Sheet No.	1 of 1
Drawing No. :	01/2BRF/09/20